

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets

(11)

EP 0 860 368 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
08.05.2002 Bulletin 2002/19

(51) Int. Cl.⁷: **B65D 19/34, B65D 19/40**

(21) Application number: **98830055.4**

(22) Date of filing: **10.02.1998**

(54) **Foot for load pallets, corrugated board boxes and the like**

Fuss für Paletten, Wellpappekartons o.ä.

Support pour palettes, boîtes en carton ou similaires

(84) Designated Contracting States:
AT DE ES FR IT

(30) Priority: **20.02.1997 IT TO970035 U**

(43) Date of publication of application:
26.08.1998 Bulletin 1998/35

(73) Proprietor: **SCA Packaging Italia Spa**
20100 Milano (IT)

(72) Inventor: **Cavallin, Angelo**
10020 Riva presso Chieri (Torino) (IT)

(74) Representative:
Buzzi, Franco et al
c/o Buzzi, Notaro & Antonielli d'Oulx
Via Maria Vittoria 18
10123 Torino (IT)

(56) References cited:
DE-U- 9 006 016 **US-A- 5 272 989**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 860 368 B1

BEST AVAILABLE COPY

Description

[0001] The present invention is related to a foot for loading pallets, corrugated cardboard boxes and the like, formed by a single die-cut and folded corrugated cardboard sheet.

[0002] A foot of the above-referenced type is known from Italian utility model application No. TO95U000176 in the name of the same Applicant. This foot has an uninterrupted tubular arrangement, with inner reinforcement baffles and terminal closing wings. This known foot, though extremely simple, sturdy and cheap, has a drawback in that only two opposite ways are available for handling, by means of a conventional fork apparatus, the loading pallet or box equipped with a pair of such feet.

[0003] The object of the present invention is thus to provide a foot of the type set forth at the beginning which, while maintaining an extremely simple and cheap construction, enables in use doubling the access ways for the forks of handling systems.

[0004] According to the invention, this object is achieved by virtue of the features set forth in Claim 1.

[0005] The pre-characterising part of claim 1 reflects the prior art known from US-A-5 272 989, wherein the rear wall of each box-like end section is merely consisting of a single-wall construction defined by connected flag portions bent so as to define a U-shaped arrangement for the said rear walls. Such a construction is far weaker than the multi-layered structure of the front wall of each box-like end section, which may involve collapsing problems of the foot in use.

[0006] By virtue of claimed construction, the foot according to the invention makes available two central passages along mutually opposite transverse directions, without negatively affecting either sturdiness of its end box-like sections, or manufacturing simplicity of the foot as a whole.

[0007] According to a preferred embodiment of the invention, one of the two longitudinal bands is provided with a pair of transverse fold lines defining a pair of terminal wings each designed to form a fourth wing overlapping the three overlapped wings of the front wall of one respective box-like end section.

[0008] The invention will now be disclosed in detail with reference to the accompanying drawings, purely provided by way of non limiting example, in which:

- figure 1 is a diagrammatic perspective view of a loading pallet provided with a pair of feet according to the invention,
- figure 2 is a perspective upside-down view of figure 1,
- figure 3 depicts the plan sheet forming one of the feet,
- figure 4 is a vertically sectioned and enlarged view along line IV-IV of figure 1,
- figure 5 is a horizontally sectioned and enlarged view along line V-V of figure 1, and
- figure 6 is a longitudinally sectioned view along line VI-VI of figure 5.

[0009] Referring initially to figures 1 and 2, reference numeral 1 generally designates a loading pallet essentially comprising a load bearing platform 2 made of corrugated cardboard or any other proper material, provided inferiorly with a pair of rise feet 3 according to the invention, which are spaced apart from each other and are extending over the full length of the bearing platform 2. Between the two feet 3, which may be secured to the bearing platform 2 by bonding or any other equivalent system, a longitudinal passage A is defined providing two access ways, in one and respectively in the opposite direction, for a fork or the like handling system.

[0010] Figures 3 through 6 show in detail the construction of one of the feet 3: the following description referred to these figures identically applies also to the other foot.

[0011] The foot 3 has a tubular construction obtained starting from a die-cut sheet of corrugated cardboard, whose plan configuration is shown as 4 in figure 3.

[0012] The sheet 4, having a generally quadrangular shape, has four longitudinal fold lines 5, 6, 7, 8 which delimit two longitudinal bands 9, 10 and three pairs of longitudinal half-bands 11, 12 alternated to the two bands 9, 10. Each half-band 11, 12 is formed with a respective pair of transverse fold lines defining thereon a central portion 14 and two lateral wings 15.

[0013] The longitudinal band 9 has a greater length than the longitudinal band 10, and is also formed with a pair of transverse fold lines 16 defining a pair of end wings 17.

[0014] Mounting of the foot 3 starting from the sheet 4 is carried out and follows.

[0015] Firstly the wings 15 of the left-side upper half-band 11, with reference to figure 3, are folded perpendicularly to the central part 14 of this half-band 11, and then the central portion 14 is folded perpendicularly to the plane of the band 9, on the side thereof. The lateral wings 15 of the intermediate half-band 11 are then folded against the wings 15 of the former half-band 11. The various elements which are in turn overlapped under mutual contact are permanently fixed to one another by means of a suitable glue or equivalent systems.

[0016] Same operation are carried out in the same way in connection with the right-side upper half-band 12 with

respect to figure 3, and in connection with the intermediate half-band 12.

[0017] Then the band 10 is folded parallelly to the band 9 and the central portion 14 of the third half-band 11, i.e. the one depicted at the bottom of the left side in figure 3, is folded over the central portion 14 of the first half-band 11, and the wings 15 of the third half-band 11 are folded against the respective previously folded wings 15 of the first and second half-bands 11. Same identical steps are carried out in connection with the third half-band 12, i.e. the one depicted at the bottom of the right side in figure 3. Even in this case the various mutually overlapped elements are permanently joined to one another by means of a proper bonding agent or equivalent systems.

[0018] Lastly the terminal wings 17 of the band 9 are folded, overlapped and fixed one against the previously overlapped three outer wings 15 of the three half-bands 11, and the other against the three previously overlapped outer wings 15 of the three half-bands 12.

[0019] At the end of the above steps, the foot 3 takes the assembled configuration shown in figures 1 and 2, with two box-like end sections 18, 19 having a generally parallelepipedal shape, spaced apart from each other and integrally connected to each other by the two longitudinal bands 9, 10, of which one forms the lower walls and the other forms the upper walls of the two box-like sections 18, 19, i.e. the whole base wall and the whole top wall of the foot 3.

[0020] Between the two box-like end sections 18, 19 a wide transverse passage B is thus defined which, in the fixed condition of the foot 3 to the bearing platform 2, defines with the corresponding passage B of the other foot 3 a second pair of ways, oriented transversally of the passage A, for engagement of a fork or the like handling system.

[0021] As it is apparent from figures 4 through 6, the opposite lateral walls of each box-like section 18, 19 are defined by the central portions 14 of the half-bands 11, 12, respectively, while the corresponding end walls are defined by the wings 15 of the same half-bands 11, 12, respectively. Accordingly, these end walls have a three-overlapped-element structure with the further addition for the outer end wall, i.e. the one arranged at the side of each box-like section 18, 19 opposite to the respective passage B, of a further fourth element formed by the corresponding terminal wing 17 of the band 9. This ensures a remarkable stiffness and strength of the two box-like end sections 18, 19 and, as a consequence, of the foot 3 as a whole.

[0022] It is to be pointed out that, while application to a loading pallet 1 has been disclosed in the above, the foot 3 according to the invention can be equally usefully and advantageously associated to the bottom wall of a corrugated cardboard box or the like.

[0023] Naturally the details of construction and the embodiments may be widely varied with respect to what has been disclosed and illustrated, without thereby departing from the scope of the present invention, such as defined in the appended claims.

Claims

1. Foot (3) for loading pallets (1), corrugated cardboard boxes and the like, formed by a single die-cut and folded cardboard sheet (4) provided with fold lines (5, 6, 7, 8, 13, 16) designed to integrally define two box-like end sections (18, 19) having a parallelepipedal shape and a pair of intermediate longitudinal bands (9, 10) which form and mutually connect to each other the upper and the lower walls of said two box-like end sections (18, 19), the front wall of each of said two box-like end sections (18, 19) being formed by three folded and overlapped wings (15, 17) of said cardboard sheet (4); said corrugated cardboard sheet (4) being further provided with four longitudinal fold lines (5, 6, 7, 8) delimiting said two longitudinal bands (9, 10) and three pairs of longitudinal half-bands (11, 12) alternated to said longitudinal bands (9, 10) and each formed with transverse fold lines (13) and designed to define the lateral walls (14) and said front and rear walls (15) of said two box-like end sections (18, 19), characterized in that each of said longitudinal half-bands (11, 12) is formed with a respective pair of said transverse fold lines (13) designed to define three folded and overlapped wings (15) not only for the front wall but also for the rear wall of each of said two box-like end sections (18, 19).
2. Foot according to Claim 1, characterized in that one of said two longitudinal bands (9, 10) is provided with a pair of transverse fold lines (16) defining a pair of terminal wings (17) each designed to form a fourth wing overlapping said three overlapped wings (15) of the front wall of one respective box-like end section (18, 19).

Patentansprüche

1. Unterteil (3) für Ladepaletten (1), Wellpappenkisten und dergleichen, welches aus einem einzigen gestanzten und gefalzten Pappbogen (4) gebildet ist, das mit Falzlinien (5, 6, 7, 8, 13, 16) ausgestattet ist, die ausgelegt sind, um integral zwei Kisten-ähnliche Endabschnitte (18, 19) zu definieren, die eine parallelepipedale Form und ein Paar dazwischenliegende Längsbanden (9, 10) aufweisen, die die obere und die untere Wand der Kisten-ähnlichen Endabschnitte (18, 19) bilden und gegenseitig miteinander verbinden, wobei die vordere Wand von jedem Kisten-ähnlichen Endabschnitt (18, 19) durch drei gefaltete und überlappende Flügel (15, 17) des Pappbogens (4) gebildet werden; wobei der Pappbogen (4) weiterhin mit vier Längsfalzlinien (5, 6, 7, 8) ausgestattet ist, die die zwei Längsbanden (9, 10) und drei Paar halbe Längsbanden (11, 12) begrenzen, die abwechselnd mit den Längsbanden (9, 10) angeordnet sind und wobei jede mit transversalen Falzlinien (13) gebildet ist und ausgelegt ist, um die Seitenwände (14) und die vordere und die hintere Wand (15) der beiden Kisten-ähnlichen Endabschnitte

(18, 19) zu definieren, **dadurch gekennzeichnet, dass** jede der halben Längsbanden (11, 12) mit einem jeweiligen Paar der transversalen Falzlinien (13) gebildet wird, die ausgelegt sind, um nicht nur für die vordere Wand, sondern auch für die hintere Wand von jedem der zwei Kisten-ähnlichen Endabschnitte (18, 19) drei gefaltete und überlappende Flügel (15) zu definieren.

2. Unterteil gemäß Anspruch 1, **dadurch gekennzeichnet, dass** eine der zwei Längsbanden (9, 10) mit einem Paar transversaler Falzlinien (16) ausgestattet ist, die ein Paar Endflügel (17) definieren, wobei jede ausgelegt ist, um einen vierten Flügel zu bilden, der die drei überlappenden Flügel (15) der vorderen Wand eines jeweiligen Kisten-ähnlichen Endabschnitts (18, 19) überlappt.

Revendications

1. Pied de support (3) pour palettes de chargement (1), boîtes en carton ondulé, et analogues, formé par une unique feuille de carton (4) découpée à l'emporte-pièce et pliée, qui est dotée de lignes de pliage (5, 6, 7, 8, 13, 16) conçues pour définir solidairement deux sections terminales en forme de boîte (18, 19) ayant la forme d'un parallélépipède et deux bandes longitudinales intermédiaires (9, 10) qui forment les parois supérieures et les parois inférieures desdites deux sections terminales en forme de boîte (18, 19) et les connectent mutuellement l'une à l'autre, la paroi antérieure de chacune desdites deux sections terminales en forme de boîte (18, 19) étant formée par trois ailes repliées et se chevauchant (15, 17) de ladite feuille de carton (4) ; ladite feuille de carton ondulé (4) étant en outre dotée de quatre lignes de pliage longitudinales (5, 6, 7, 8) délimitant lesdites deux bandes longitudinales (9, 10) et trois paires de demi-bandes longitudinales (11, 12) disposées en alternance avec lesdites bandes longitudinales (9, 10) et dotées chacune de lignes de pliage transversales (13) et conçues de manière à définir les parois latérales (14) et lesdites parois avant et arrière (15) desdites deux sections terminales en forme de boîte (18, 19), **caractérisé en ce que** chacune desdites demi-bandes longitudinales (11, 12) est dotée d'une paire respective desdites lignes de pliage transversales (13) conçues pour définir trois ailes repliées et se chevauchant (15) non seulement pour la paroi avant, mais aussi pour la paroi arrière de chacune desdites deux sections terminales en forme de boîte (18, 19).
2. Pied de support selon la revendication 1, **caractérisé en ce que** l'une desdites deux bandes longitudinales (9, 10) est dotée d'une paire de lignes de pliage transversales (16) définissant une paire d'ailes terminales (17) conçues chacune pour former une quatrième aile chevauchant lesdites trois ailes chevauchées (15) de la paroi avant d'une section terminale en forme de boîte (18, 19) respective.






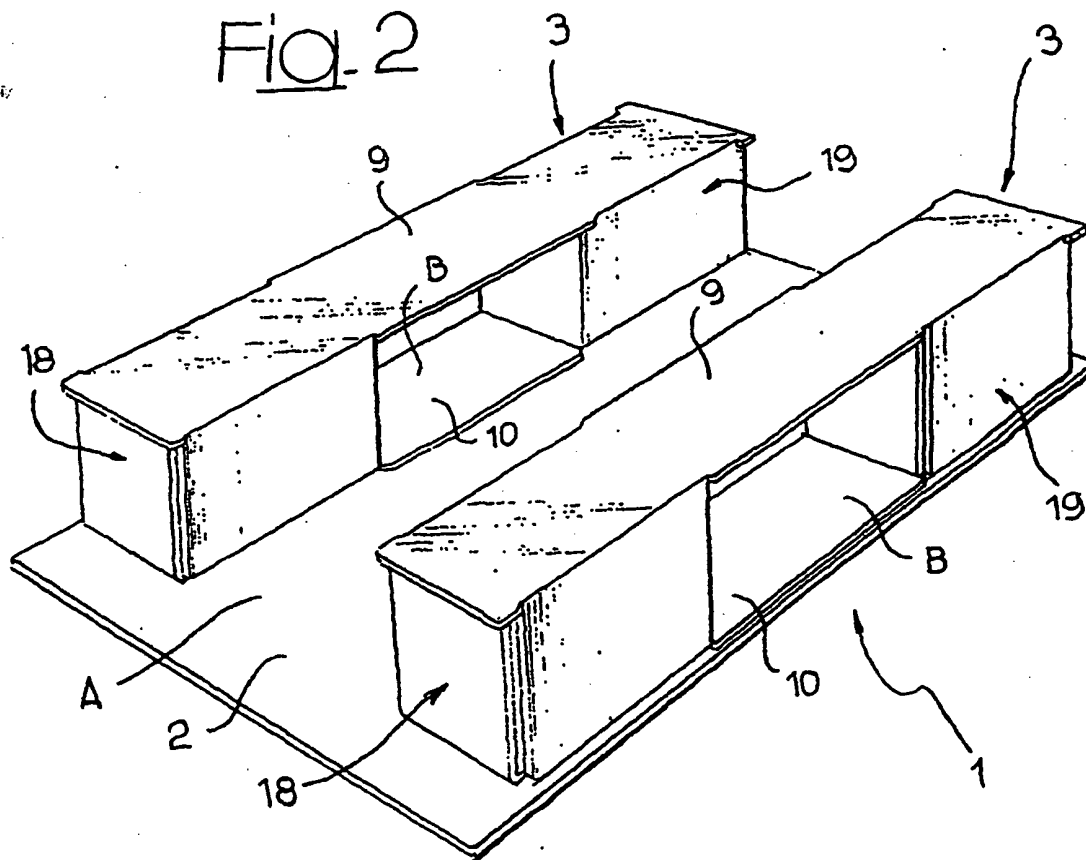


FIG. 3

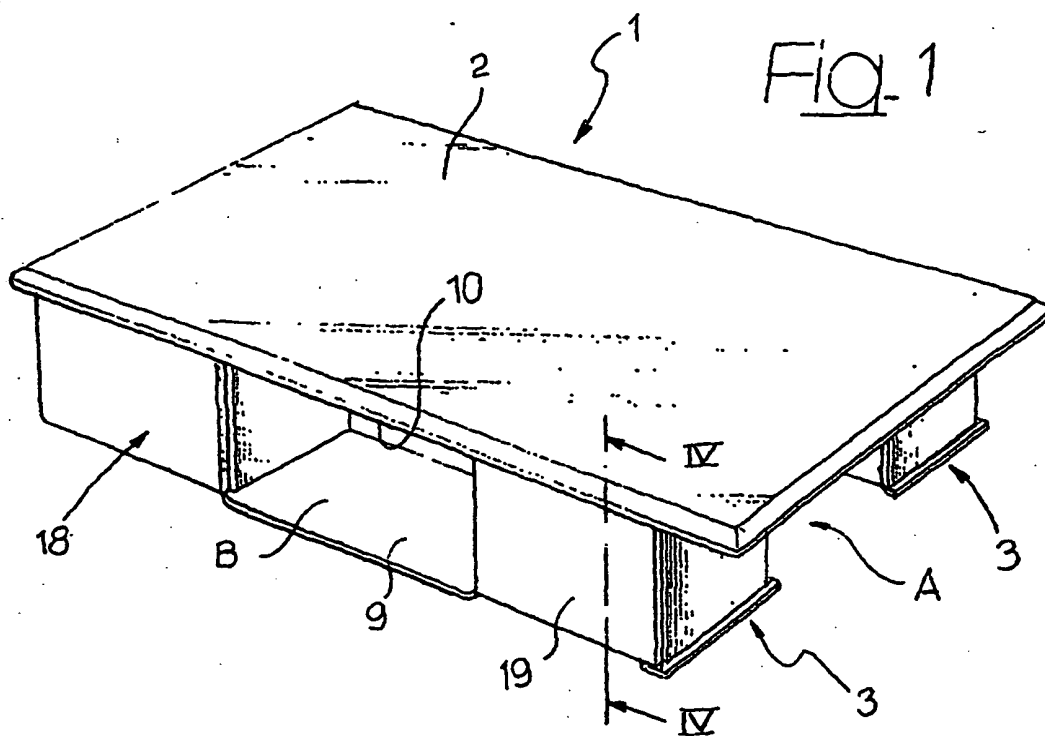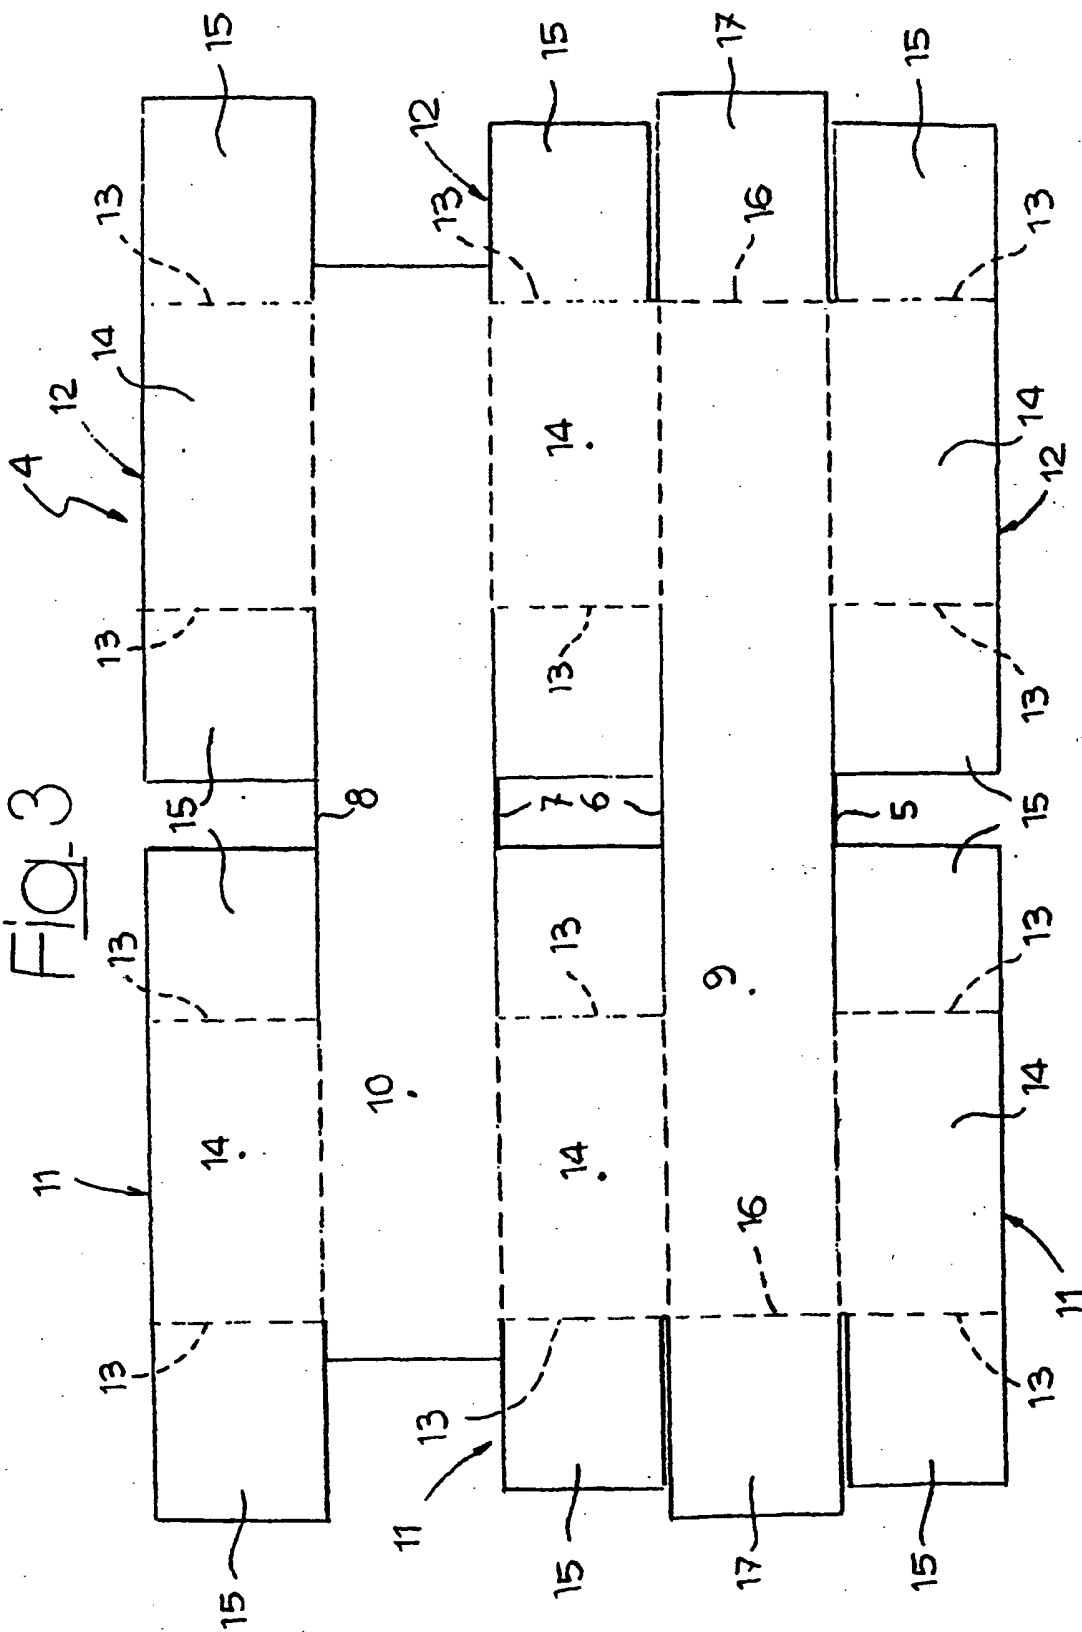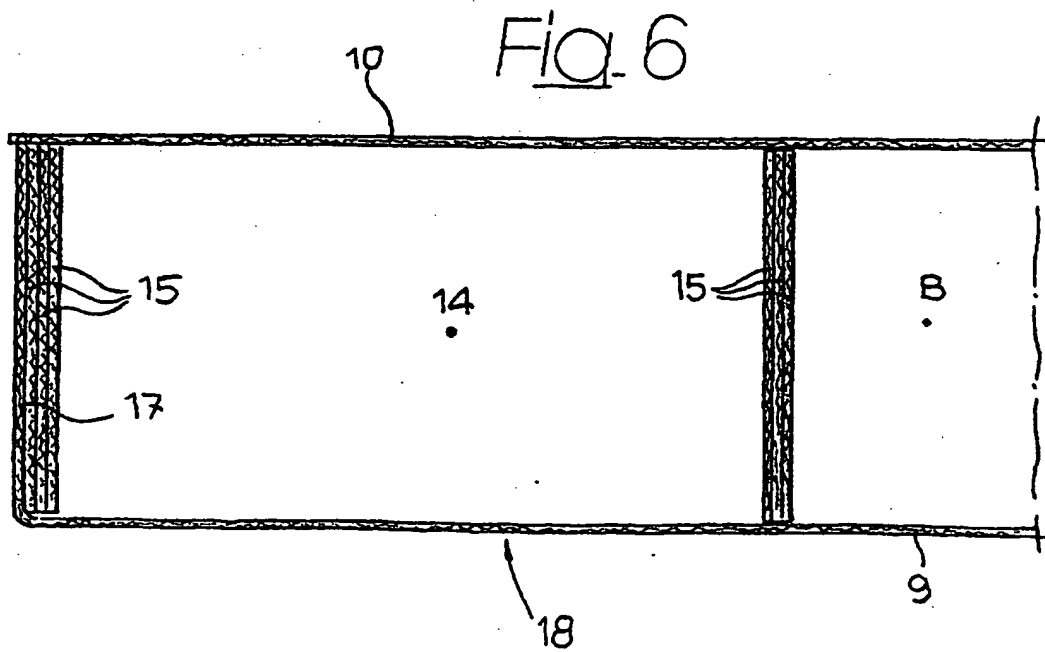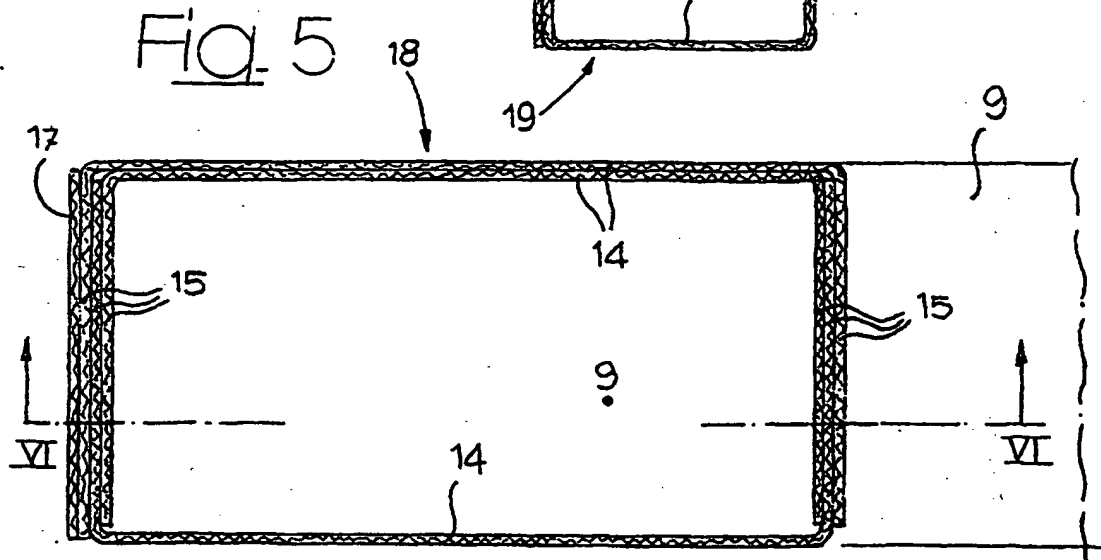

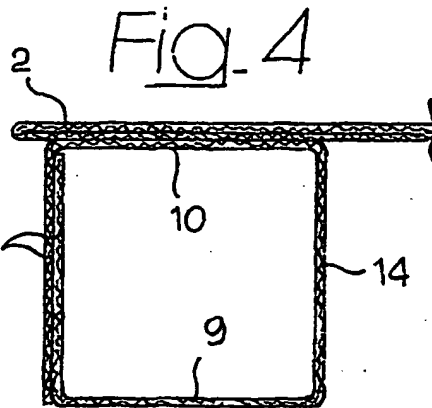

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.